
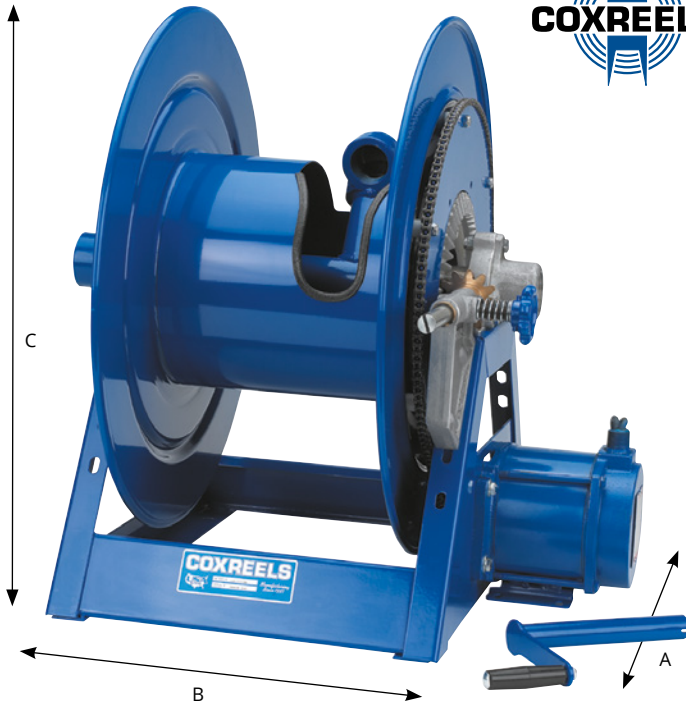


# Competitor 1185 Series & 1195 Series

Series 1185/1195 hand crank reels are designed for industrial applications where larger bore sizes and longer lengths of hose are required. Constructed in heavy gauge powder coated steel, all models are assembled and ready for wall, floor or overhead installation. The direct crank action combined with twin bearings requires minimum rewind effort, while the spring-loaded locking pin prevents drum rotation when not in use. Series 1185/1195 power rewind reels combine the necessity of long hose lengths with the convenience of automatic

**FEATURES:**

- Discs: Heavy gauge rolled edge steel for strength and to eliminate hose damage
- One piece, all welded steel 'A' frame construction
- Lock pin: Standard on hand crank models, available at extra cost on power rewind
- Motor rewind options: Electric (12, 24, 115v and 230v), compressed air and hydraulic
- Bearing: Self aligning pillow block bearings support the drum assembly
- Rewind mechanism: Chain and sprocket drive on all power rewind reels
- Swivel joint: Permits reel to rotate smoothly while connected to the fluid source
- Swivel joint inlets are all zinc plated. Stainless steel and other alloys can be supplied to meet special requirements.
- Drum assembly: All steel construction
- Axle/riser assembly: Provides full flow through the internal plumbing
- Rewind hand crank: Solid steel with a roller hand grip
- Tension brake: Standard on hand crank models

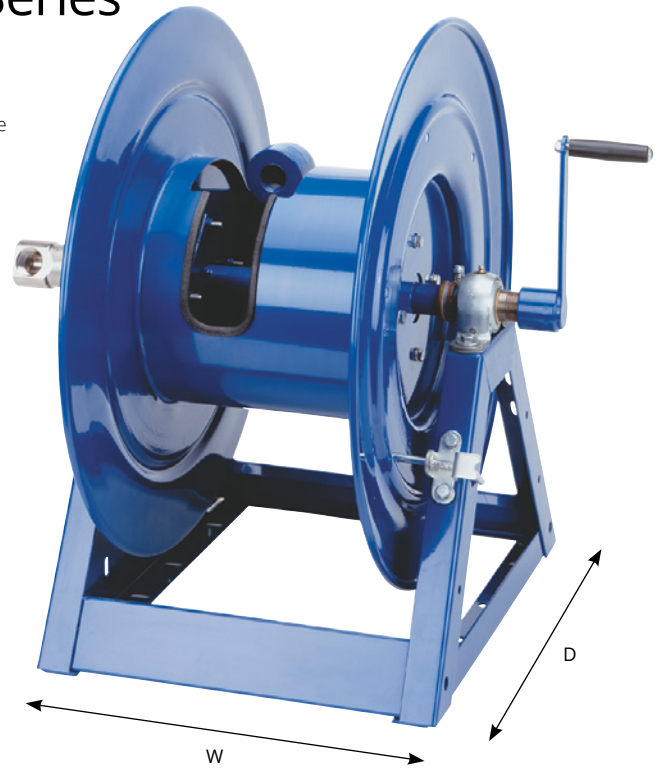

**Rewind:** Hand crank - Hand crank attaches to axle and is permanent. The handle may be removed for flushing out purposes. NB. The handle would not under normal circumstances be removed when the reel is under pressure. Doing so will open the flow path and potentially harm the operator.

**Motor -** Chain and sprocket drive. Auxiliary hand crank available as an option.

**Inlet swivel assembly:**

Series	Swivel assembly
1185-8 Series	1 1/2" N.P.T. straight
1195-9/13/20 Series	2" N.P.T. 90°

**Outlet riser:**

Series	Riser
1185-8 Series	1 1/2" female N.P.T.
1195-9/13/20 Series	2" female N.P.T.



**Hose roller guides:** Please consult our sales team.

**Product temperatures:** These reels handle product temperatures from -28°C to +107°C.

**Product working pressure:** See table below.

**Supplied as bare reel, hose available at extra cost (Application required).**

Hose capacity ft/m		Model number	Reel dimension (mm)				Inlet & outlet NPT females	Working pressure	Weight less hose
1 1/4"	1 1/2"		Drum diameter	Depth A	Width B	Height C			
75/23	50/15	1185-1124	267	610	611	635	1 1/2" NPT (F)	600 psi	35kgs
100/30	75/23	1185-1524	267	610	713	635	1 1/2" NPT (F)	600 psi	37kgs
125/38	100/30	1185-2024	267	610	826	635	1 1/2" NPT (F)	600 psi	43kgs
220/67	150/45	1185-2528	267	711	953	737	1 1/2" NPT (F)	600 psi	56kgs
325/100	250/76	1185-3328	267	711	1156	737	1 1/2" NPT (F)	600 psi	77kgs

Hose capacity ft/m		Model number	Reel dimension (mm)				Inlet & outlet NPT females	Working pressure	Weight less hose
1 1/2"	2"		Drum diameter	Depth A	Width B	Height C			
60/18	50/15	1195-932	394	813	508	845	2" NPT (F)	600 psi	58kgs
100/30	75/23	1195-1332	394	813	610	845	2" NPT (F)	600 psi	68kgs
150/45	115/35	1195-2032	394	813	775	845	2" NPT (F)	600 psi	86kgs