


DP Dual Spring Rewind Hose Reels

Redashe DP reels feature two independent swivel joints and two outlet risers to simultaneously handle two hoses of equal length on one reel. Siamesed, separate or hoses of different diameters can be accommodated in which case the larger hose diameter determines the capacity of the reel. Finished in a durable powder coated paint to resist corrosion. DP reels are ideal for twin service delivery to a single source or flow/return applications. All reels feature latching of hose with fully automatic spring rewind.

FEATURES:

- Twin inlets/outlets on a single drum
- Heavy duty steel construction with durable blue powder finish
- Reinforced steel frame for maximum stability
- Suitable for floor, wall or overhead mounting
- Latching of hose at any length
- Fully automatic spring rewind
- Externally mounted full flow swivels for maximum product delivery
- Four way stainless steel roller guides reduce hose wear
- All working parts easily accessible for servicing

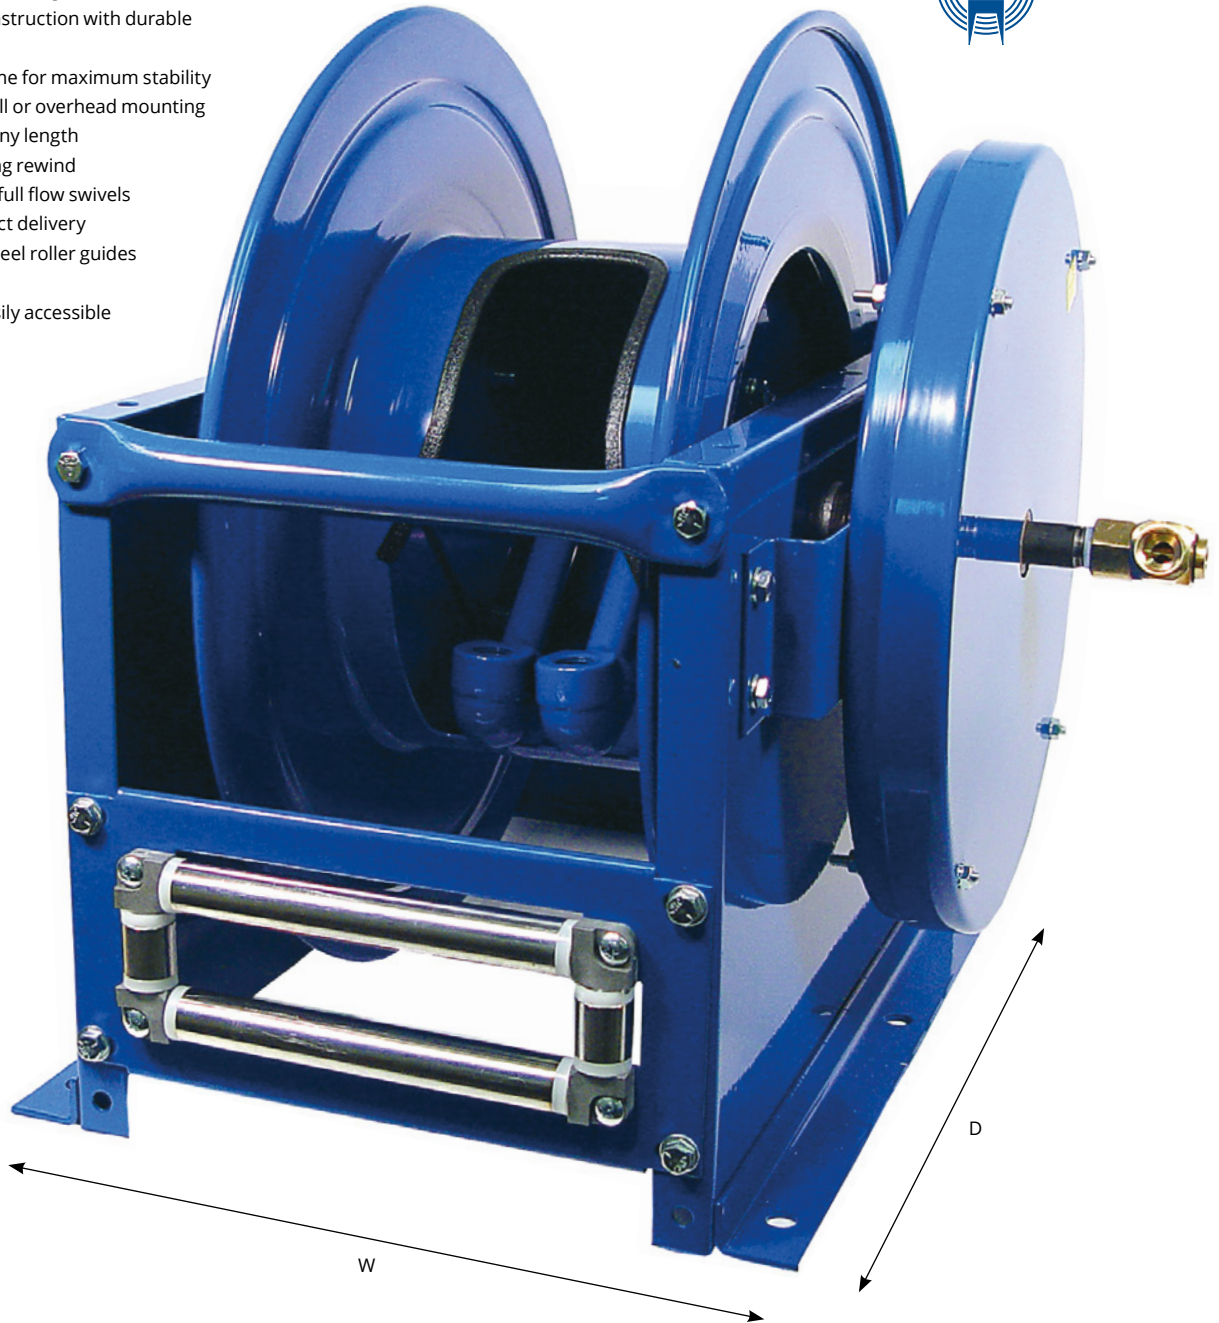

Model reference	Hose capacity			Max PSI	Swivel in/Out	Size index
	I.D.	O.D.	Length (m)			
DLPL-350	3/8"	5/8"	2 x 15	300	3/8" BSPF	1
DLPL-3100	3/8"	3/4"	2 x 30	300	3/8" BSPF	2
DLPL-450	1/2"	7/8"	2 x 15	300	1/2" BSPF	1
DLPL-4100	1/2"	7/8"	2 x 30	300	1/2" BSPF	3
DMPL-350	3/8"	5/8"	2 x 15	3000	3/8" BSPF	1
DMPL-3100	3/8"	25/32"	2 x 30	3000	3/8" BSPF	2
DMPL-450	1/2"	7/8"	2 x 15	3000	1/2" BSPF	1
DMPL-4100	1/2"	29/32"	2 x 30	3000	1/2" BSPF	3

Further models are available in this range. Details on request.

■ Supplied as bare reel, hose available at extra cost (Application required).

Size index	Reel dimensions (mm)			Approx weight less hose
	W	H	D	
1	559	521	572	46 kg
2	572	622	660	55 kg
3	572	724	762	63 kg