

Pure Flo Hose Reels

Redashe Pure Flo hose reels safely and efficiently manage, protect and store costly breathing air or food quality hose. Guard against the dangers associated with tangled hose that can lead to trips and kinks that have potential for disaster. Pure Flo hose reels are the perfect solution to the challenge of managing hoses. Offered in spring rewind, hand crank, and motorized retraction, all Pure Flo hose reels come standard equipped with stainless steel air paths and stainless steel swivels with food quality grease, ensuring clean, non-contaminated transfer of products.



For up to date
information and
prices please visit -
www.redashe.com

BENEFITS:


- Store hose safely and efficiently
- Increased operator safety by eliminating tangles, kinks, trips, and falls that result from non-use
- Preserve and extend the life of your costly hose and equipment

FEATURES:

- For low pressure and high pressure breathing air
- Available in hand crank, motorised or spring rewind retraction
- Coxreels' quality solid steel construction
- Durable electrostatic powder coat finish
- Stainless steel reels available

Pure Flo Competitor Hand Cranked and Power Rewind Hose Reels

Pure Air large capacity hand crank reels are designed for industrial applications where longer lengths of hose are required. Constructed in heavy gauge powder coated steel, all models are assembled and ready for wall, floor or overhead installation.

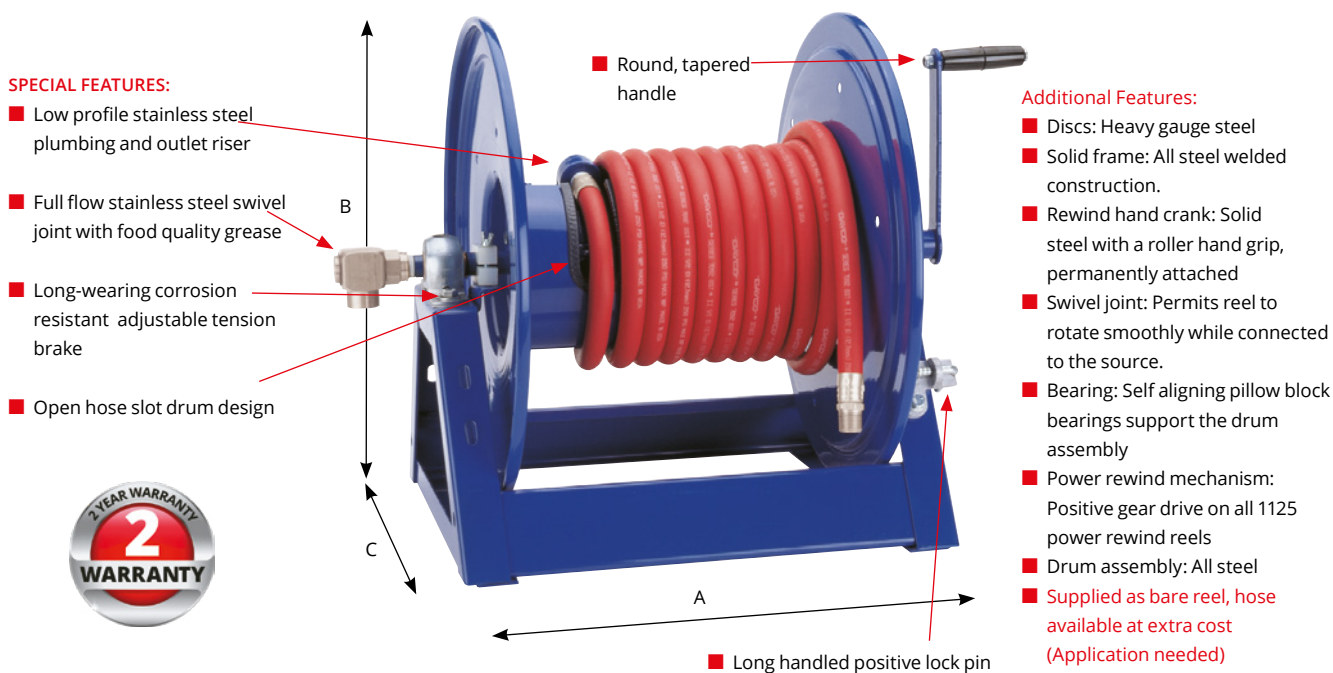

LOW/MEDIUM PRESSURE

Hose capacity (m)		Model number	Reel dimension in mm					Inlet & outlet size B.S.P. (in)	Working pressure P.S.I.	Appx weight Lbs less hose
I.D. $\frac{3}{8}$ " O.D. $\frac{3}{4}$ "	I.D. $\frac{1}{2}$ " O.D. $\frac{7}{8}$ "		Width A (crank)	Width A (elec.)	Width A (air)	Height B	Depth C			
42.5	30	1125L-P-3-140	552	467	419	460	445	$\frac{1}{2}$ "	3000	16 kg
60	45	1125L-P-3-200	603	518	470	460	445	$\frac{1}{2}$ "	3000	17 kg
90	60	1125L-P-3-300	705	619	572	460	445	$\frac{1}{2}$ "	3000	18 kg

HIGH PRESSURE

Hose capacity (m)		Model number	Reel dimension in mm					Inlet & outlet size B.S.P. (IN)	Working pressure P.S.I.	Appx weight Lbs less hose
I.D. $\frac{1}{2}$ " O.D. $\frac{3}{4}$ "	I.D. $\frac{1}{2}$ " O.D. $\frac{7}{8}$ "		Width A (crank)	Width A (elec.)	Width A (air)	Height B	Depth C			
42.5	30	1125L-HP-3-140	552	467	419	460	445	$\frac{1}{2}$ "	6000	16 kg
60	45	1125L-HP-3-200	603	518	470	460	445	$\frac{1}{2}$ "	6000	17 kg
90	60	1125L-HP-3-300	705	619	572	460	445	$\frac{1}{2}$ "	6000	18 kg

Available with power rewind options, please contact our sales staff for details