

Groz Lubrication Accessories

Grease Couplers

ZHC144B Hydraulic Coupler 4-Jaw

Professional hydraulic coupler. 4-Jaw 1/8" BSPT thread and hex nut.

FEATURES:

- 4-Jaw construction
- Maximum pressure 6000psi (413 bar)
- Suitable for hand operated grease guns
- Hexagonal nut for easy tightening



ZBHC Swivelling Button

Coupler Zinc die cast coupler body for greasing button head fittings, found mostly on heavy machinery or contractor's equipment.

FEATURES:

- Maximum working pressure 3,000psi (207 bar)
- Swivelling for 5/8" (16mm) button head fittings
- Metal seal increases resistance to wear




ZHC21B Quick Disconnect Grease Coupler

The Groz quick disconnect grease coupler is designed for quick and convenient disengagement of the coupler from the grease/zerk fittings under pressure. To engage the coupler, simply press the thumb lever and slide the coupler onto the fitting. The hardened 6 cylindrical balls hold the grease/zerk fitting tight. Once greasing is completed simply press the thumb lever again to disconnect the coupler from the fitting.

FEATURES:

- Suitable for pressures up to 8000psi / 550bar
- The coupler will not move thus allowing a hands free operation
- Suitable for battery, air and manual operated grease guns
- Slim line diameter 17mm
- Unique 6 point contact design
- Thread: 1/8" BSPTF

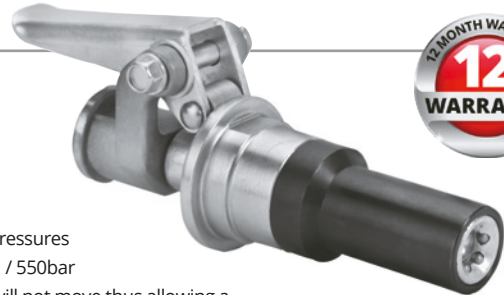


ZHCSW3B 360 degree hydraulic coupler

Professional 360° hydraulic coupler. 3-Jaw 1/8" BSPT thread and hex nut.

FEATURES:

- Swivels in a full 360° circle and locks conveniently at any 45° positions
- Jaws are fully hardened for extended service life
- Hardened coupler body and swivel joints withstand high-pressure applications without deformations
- Spring loaded ball check valve helps retain grease pressure
- Suitable for up to 7,000psi / 483 bar

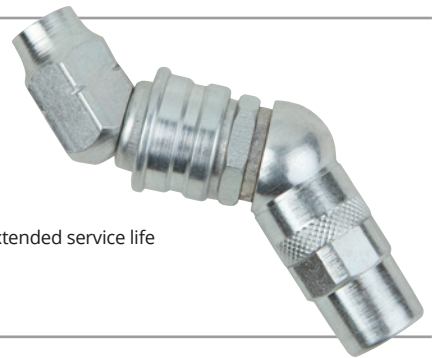


ZHOC-1 Hook on Buttonhead Coupler for 5/8" (16mm)

Zinc die cast coupler body for greasing button head fittings, found mostly on heavy machinery or contractor's equipment.

FEATURES:

- Maximum working pressure 3,000psi (207 bar)
- Swivelling for 5/8" (16mm) button head fittings
- Metal seal increases resistance to wear

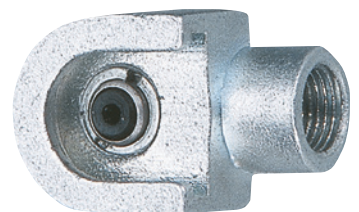

ZPCN-2 Heavy Duty Hook on Buttonhead Coupler for 7/8" (22mm)

Zinc die cast coupler body for greasing button head fittings, found mostly on heavy machinery or contractor's equipment.

FEATURES:

- Maximum working pressure 7,500psi (517 bar)
- Swivelling for 7/8" (22mm) button head fittings
- Metal seal increases resistance to wear

