



IRT IR DRYERS BY HEDSON

IRT 3-1 & 3-2 PcD

These are the standard dryers for all types of workshops. They are mostly used for small to medium-sized repairs and for primers, but has sufficient output to cure all kinds of paint materials. The IRT PcD by Hedson dryers are equipped with a control unit for computerized curing process. There is a program for each drying requirement and due to the easily understandable and self-instructional menu, program selection is quick and easy. 18 different languages can easily be set.




COMPUTORIZED CURING PROCESS

12 pre-set and 3 custom programs and a choice of 18 different languages makes the equipment easy to use



EVEN HEAT DISTRIBUTION

Equipped with one or two cassettes including three infrared lamps with gold coated FreeForm reflectors each and powerful ventilation that cools the cassette and increases lamp life

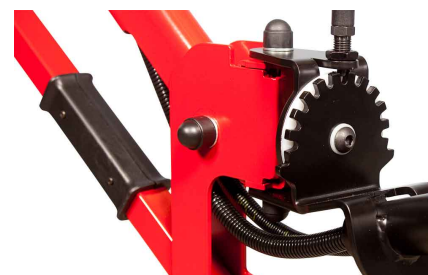

CASSETTE POSITIONING

Unique possibilities to position the cassettes due to the special angle of the arm and the stand design

IRT 3-1 PCD

IRT 3-1 PcD - version 1	Part.no. 800450
IRT 3-1 PcD - version 2	Part. no. 800451
IRT 3-1 PcD - version 3	Part. no. 800447
IRT 3-1 PcD - version 4	Part. no. 800483
IRT 3-1 PcD - version 5	Part. no. 800467
Shipping dimensions	3 cardboard boxes, pallet - 1600x950x750 mm, 91 kg
Frequency	50-60 Hz
Current	8 A
Output power	3 kW
Fuse	16 A
Max. Cassette Height	2250 mm (horizontal), 2550 mm (vertical)
Dimensions (Stand)	1600 x 350 x 470 mm, 33 kg
Dimensions (Cassette)	600 x 550 x 200 mm, 6 kg
Dimensions (Base)	1200 x 950 x 120 mm, 18 kg
Voltage - version 1	400V, 3 PH, 4pin, EU
Voltage - version 2	400V, 3 PH, 5pin, EU
Voltage - version 3	230V, 3 PH, EU
Voltage - version 4	400V, 3 PH, AUS
Voltage - version 5	230V, 1 PH, NA ETL

IRT 3-2 PCD

IRT 3-2 PcD - version 1	Part.no. 800453
IRT 3-2 PcD - version 2	Part.no. 800454
IRT 3-2 PcD - version 3	Part.no. 800459
IRT 3-2 PcD - version 4	Part.no. 800455
IRT 3-2 PcD - version 5	Part.no. 800484
IRT 3-2 PcD - version 6	Part.no. 800458
Shipping dimensions	4 cardboard boxes, pallet - 1600x950x750 mm, 99 kg
Frequency	50-60 Hz
Current	15 A
Output Power	6 kW
Fuse	16 A
Max. Cassette Height	2250 mm (horizontal), 2550 mm (vertical)
Dimensions (Stand)	1600 x 350 x 470 mm, 35 kg
Dimensions (Cassette)	600 x 550 x 200 mm, 6 kg
Dimensions (Base)	1200 x 950 x 120 mm, 18 kg
Voltage - version 1	400V, 3 PH, 4pin, EU

Voltage - version 2 400V, 3 PH, 5pin, EU
Voltage - version 3 230V, 3 PH, EU
Voltage - version 4 400V, 3 PH, AUS
Voltage - version 5 200V, 3 PH, 4P, JP
Voltage - version 6 230V, 1 PH, NA ETL

CONSUMABLES

LAMP-IR 1KW

Lamp-IR 1kW 235V 360 U CPL
Part.no. 102700

LAMP-IR 2KW

Lamp-IR 2kW 235V 360 U CPL
Part.no. 102699

IRT CASSETTE AIR FILTER

IRT cassette air filter
Part.no. 713576

IRT CASSETTE AIR FILTER, 10-PCS

IRT cassette air filter, 10-pcs
Part.no. 713576-10